ADX 3800/15-6 CC

Made in Türkiye

3 Faz-Phase / 4 Kutup-Poles / 220-240*380-415 V / 50 Hz

Elektriksel Özellikler / Electrical Features

Faz / Phase	Devir / Rpm	Frekans / Frequency(Hz)	Giriş Voltajı / Input Voltage	Giriş Gücü / Input Power	Giriş Akımı / Input Current	Güç Faktörü/Power Factor	Ia / In
3	1500	50	220-240/380-415	2270W	▲--- Y 3,80	80 %	6,84


Teknik Özellikler / Technihal Features

Santrüfüj Kuvveti / Centrifugal Force(Kg/F)	3908Kg/F (38,33 kN)
Statik Moment / Statical Moment(Kg*mm)	1554,1 Kgmm
Gres Tipi / Type Of Grase	KLUBER ISOFLEX NB52
Ömür Boyu Gres / Grased For Life	Evet / Yes
Montaj Civatası / Mounting Screw	M20
Kablo Rekoru / Cable Gland	NPT 3/4''
Ağırlık / Weight (Kg)	112,5

Rulmanlar / Bearings

Rulman Tipi / Bearing Type	NJ 2312

Çizim Drawing — Gövde Ölçüleri - Overall Dimensions (mm)

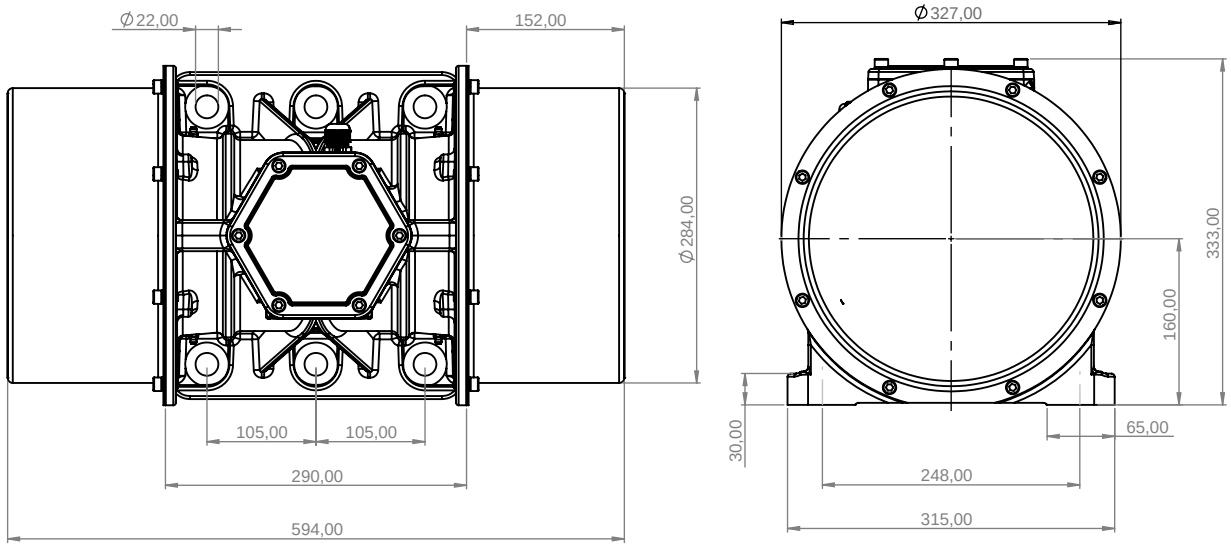



II 2D Ex tb IIIC T120°C Db,IP66
II 2G Ex db IIB T4 Gb
T.amb-20/+60°C

AVIBRO ELEKTRIK MOTORLARI SAN. VE TIC. A.S. guarantees its products for a period of two (2) years from the date of delivery against defects in materials and workmanship.

www.avibro.com

REV.00